

# Table of Contents

## Categorized Listing

GREASE FITTINGS	1
1/8 IN. MALE PIPE THREAD	1
1/4-28 THREAD	1
DRIVE TYPE	1
1/4 IN. MALE PIPE THREAD	2
MISCELLANEOUS FITTINGS	2
BUTTONHEAD FITTING	2
METRIC FITTINGS	3
GREASE GUN	3
BATTERY POWERED	3
LEVER	4
PISTOL GRIP	4
PNEUMATIC	5
PREMIUM	5
GREASE GUN ACCESSORY	5
GREASE GUN COUPLER	5
GREASE HOSE	6
WHIP HOSE EXTENSION	6
HOSE REEL	6
AIR & WATER	6
HEAVY DUTY	7
BARE REEL	7
HOSE REEL ACCESSORY	7
HOSE STOPS	7
METERS, VALVES & ACCESSORIES	8
METER	8
NOZZLE	8
SWIVEL	8
VALVES	9
VALVE REPAIR KIT	9
PUMPS	9
DIAPHRAM	9
MANUAL	10
ROTARY DRUM PUMP	10
TRANSFER	11
GREASE FITTING KITS	12
GREASE FITTINGS KIT	12
METRIC GREASE FITTINGS KIT	12
FILTERS, REGULATORS & LUBRICATORS	13
FILTERS	13
REGULATORS	13
LUBRICATORS	14
COMBOS	14

---

**GREASE FITTINGS**

**1/8 IN. MALE PIPE THREAD**



Item	Description	Length
610	STRAIGHT	11/16
612	67 DEG ANGLE	27/32
613	90 DEG ANGLE	13/16
618	STRAIGHT FPT	1
667	STRAIGHT	1-1/4
688	45 DEG ANGLE	1
699	STRAIGHT	1-3/4

**1/4-28 THREAD**



Item	Description	Length
636	45 DEG ANGLE	1
638	90 DEG ANGLE	47/64
641	STRAIGHT	17/32
652	STRAIGHT	45/64
680	STRAIGHT	15/16
698	STRAIGHT	1-1/16

**DRIVE TYPE**



Item	Description	Length
608	5/16 STRAIGHT	9/16
632	3/16 STRAIGHT wo/BALLCK	31/64
666	5/16 STRAIGHT wo/BALLCK	9/16
728	3/16 STRAIGHT	37/64
739	3/8 STRAIGHT	5/8
743	1/4 STRAIGHT	39/64
744	3/16 65 DEG	49/64
952	1/4 STRAIGHT wo/BALLCK	13/32

**1/4 IN. MALE PIPE THREAD**



Item	Description	Length
627	STRAIGHT	59/64
629	67-1/2 DEG ANGLE	1-1/16

**MISCELLANEOUS FITTINGS**



Item	Description	Length
616	5/16-24 ST. THRD	21/32
617	3/8-24 ST. THRD	21/32

**BUTTONHEAD FITTING**



Item	Description
671	1/4 PTF-5/8 DIA

**METRIC FITTINGS**



Item	Description	Length
3610	8MM 1.0 STRAIGHT	
3613	8MM 1.0 90 DEG ANGLE	
3637	6MM 1.0 45 DEG ANGLE	
3638	6MM 1.0 90 DEG ANGLE	
3641	6MM 1.0 STRAIGHT	
3688	8MM 1.0 45 DEG ANGLE	
3710	10MM 1.0 STRAIGHT	
3737	10MM 1.0 45 DEG ANGLE	
3738	10MM 1.0 90 DEG ANGLE	
609201	8MM 1.25 STRAIGHT	14.7mm
609501	10MM 1.5 STRAIGHT	25.5mm
617545	8MM 1.25 45 DEG ANGLE	23.0mm

**GREASE GUN**  
**BATTERY POWERED**



Powerful battery-operated grease gun. Includes a multi-function LCD which has an easy to understand readout showing the qty of lubricant being dispensed. LED lights to be able to locate fittings when under equipment or in the shade. High-performance motor. Heavy-duty pump casting. Two-speed transmission delivers excellent output and pressure. Longer 36in. high-pressure hose. Air-purge valve for immediate prime.

Item	Description
L1242	12V GREASE GUN
L1801	18V BATTERY
L1842	18V NICAD BATT
L1862	18V GREASE GUN
L1864	18V LI-ION

**LEVER**



Heavy-duty lever-type grease guns. Rugged cast pump head for strength and durability. Jam-proof to toggle mechanism prevents binding. Locking follower rod with removable end cap. Extra-heavy follower spring insures positive priming and uninterrupted pumping action. Accessible check valve allows easy cleaning without gun disassembly. Precision fit and hardened plunger prevents lubricant bypass, resists scoring for long life.

Item	Description
L1142	CAST IRON PUMP HEAD, PRECISION FIT PLUNGER, EXTRA HEAVY FOLLOWER SPRING
L1147	ATTACHED 18" WHIP HOSE AND COUPLER
L1148	DUAL GREASE INPUT PORTS
LG100	LEVER ACTION GREASE GUN

**PISTOL GRIP**



L1134 - Extra heavy-duty pistol grip-type grease gun. Cast head design. Jam proof handle return mechanism. Develops up to 7500 psi. Includes both 18in. whip hose with coupler and 6 in. rigid tube. Variable stroke allows a high pressure option for high tolerance applications. Includes combination air bleeder/filler nipple to bulk fill and easily release trapped air. 16oz

LG112 - Extra heavy-duty pistol grip-type grease gun. 4in. straight pipe. Develops up to 7500 psi. 16oz

Item	Description	PSI
L1134	INCLUDES 18" WHIP HOSE W/ COUPLER & 6" RIGID TUBE	7500
LG112	PISTOL GRIP GREASE GUN	

**PNEUMATIC**



Powerluber fully automatic pneumatic grease gun. The variable speed trigger provides excellent grease flow control while the advanced pump design eliminates traditional priming issues. Durable and dependable, fully automatic, continuous operation, variable-speed trigger, accessible check valve assembly, comfortable grip, 30in high-pressure hose with coupler. Includes a combination filler nipple and bleeder valve. Standard grease cartridge.

Item	Description	PSI
L1162	AUTOMATIC PNEUMATIC GREASE GUN	6000

**PREMIUM**



Dual pressure – dual output premium grease guns. High-output setting delivers twice the grease per stroke. High or low pressure for light or heavy-duty greasing action. Full pressure on short strokes for heavy greasing in tight places; develops full pressure with just 1/4in stroke. Extension swivels 360 degrees for hard-to-reach fittings. Plated barrel, head and handle. Handy three-way loading: cartridge, filler pump or bulk. Comfortable and ergonomic grip.

Item	Description	PSI
L1013	DUAL PRESSURE 16OZ	7000/4000
L1145	DUAL PRESSURE 21OZ	7000/4000

**GREASE GUN ACCESSORY**  
**GREASE GUN COUPLER**



L5845

L5852

L81458

Item	Description	PSI
L5845	HYD COUPLER - HEAVY DUTY	7500
L5852	HYD COUPLER	6000
L5852-54	HYD COUPLER COUNTER DISPLAY	
L81458	5/8 DIA BUTTON HEAD	4000

**GREASE HOSE**



12" Grease Hose 1/8" NPT. 3,500psi maximum. For hand grease gun only. Replace if damaged.

Item	Description	PSI	Inlet Size	Outlet Size
8012	12" HOSE EXTENSION	3500	1/8"	1/8"

**WHIP HOSE EXTENSION**



18" Whip hose extension. Designed for use with the Lincoln PowerLuber grease gun. Performance engineered for all automotive, industrial and farm applications. Use with Lincoln Model 5852 or 5845 hydraulic coupler. Attaches to Model series 1200, 1400, 1800, 1162 and 1163 PowerLuber. Working pressure 7,500psi. Burst pressure 28,00psi.

Item	Description	PSI	Inlet Size	Outlet Size
L1218	18" WHIP HOSE EXTENSION	7500	7/16"	1/8"

**HOSE REEL**

**AIR & WATER**



Lincoln's air and water hose reels are constructed of durable, heavy-gauge steel and quality hoses. Designed for stationary indoor and outdoor use, they can be attached to most surfaces that can be drilled. Features includes five-position adjustable outlet roller arm, spring-powered automatic recoil, angled hose guide for smooth, parallel hose pull-out and retraction and an eight-position ratchet gearing that locks the reel at the desired hose length. 300 psi.

Item	Description	PSI	Inlet Size	Length
L83753	3/8" HOSE	300	1/4"	50 FT
L83754	1/2" HOSE	300	1/2"	50 FT

**HEAVY DUTY**



Dual reel sheave support base design and high-flow swivel make this 1 in. inlet/outlet reel the ideal low-pressure/volume reel. This reel is suitable for gasoline, diesel fuel, fuel oil, air and water. Not suitable for ceiling or wall mounted applications.

Item	Description	PSI	Inlet Size	Length
L84432	HD VOLUME REEL	300	1"	50FT

**BARE REEL**



Dual support heavy-duty LFR hose reel. Exceptional stability for rugged, demanding applications.

Item	Description	PSI	Inlet Size	Length	Application
L94200DS	BARE REEL	1000	1/2"	75 FT	AIR/WATER

**HOSE REEL ACCESSORY**

**HOSE STOPS**



Adjustable ball hose stop

Item	Description	OD
L85515	3/8" HOSE	5/8"
L85517	1/2" HOSE	27/32" - 3/32"



**METERS, VALVES & ACCESSORIES**

**METER**



L280690



L961

Item	Description	PSI	Inlet Size	Outlet Size	Compatible Fluids
L280690	FLEXIBLE DISPENSE METER - DIGITAL	1500	3/4"	1/2"	
L961	HIGH VOLUME IN GALLONS	50			GASOLINE, DIESEL FUEL, LIGHT WEIGHT PETROLEUM PRODUCTS

**NOZZLE**



L84799



L261484


Item	Description	PSI	Thread Size
L261484	AUTO NON-DRIP NOZZLE ASSEMBLY	1000	1/2"
L84799	SEMI-AUTOMATIC NON-DRIP NOZZLE ASSEMBLY		1/4"

**SWIVEL**



Item	Description	Thread Size
L81387	HIGH PRESSURE UNIVERSAL SWIVEL	1/2"-27 X 1/4" NPT
L81974	90 DEG. HIGH PRESSURE SWIVEL	1/2"-27 X 1/4" NPT
L82399	STRAIGHT SWIVEL	1/2"-27 X 1/4" NPT

**VALVES**

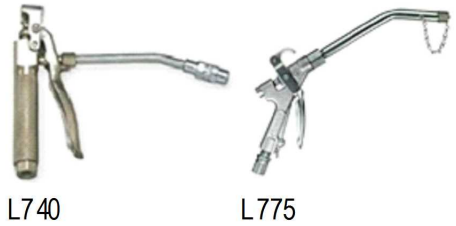

Item	Description	PSI	Inlet Size	Outlet Size	Thread Size
L740	HEAVY-DUTY, HIGH-PRESSURE				1/4 NPT
L775	CAP TIP	1000	1/2"	1/2"	

**VALVE REPAIR KIT**



Item	Description
L82157	CONTROL VALVE REPAIR KIT FOR CONTROL VALVE MODELS 740 & 3050

**PUMPS**

**DIAPHRAM**



Diaphragm pumps are driven by compressed air. The directional air distribution valve and pilot valve – the “air end” – are located in the center section of the pump. Liquid moves through two manifolds and outer chambers of the pump, the “wet end”. Generally, check valves are located at the top and bottom of each outer chamber or on a common manifold. The two outer chambers are connected by suction and discharge manifolds. Lincoln’s double diaphragm self-priming design offers many advantages over other pumps. Environmentally friendly, runs dry without damage, variable flow, explosion-proof, pumps viscous materials.

Item	Description	PSI	Inlet Size	Application
L85627	ALUMINUM DIAPHRAM PUMP	125	1"	NEW/USED OIL, AF

**MANUAL**



These quality-built Lincoln manual operated bucket pump dispenses high-pressure lubrication in any weather. Unit clamps on any 25 to 50lb refinery container in 60 seconds. Includes model 275184 flexible follower plate.

Item	Description	PSI
L1292	BUCKET PUMP	2500

**ROTARY DRUM PUMP**



L1387      LG402

L1387 - Heavy-duty 3/4" x 8 ft. anti-static hose with non-sparking aluminum nozzle. Flame arrestor and anti-siphoning vacuum break. Seal-tight telescoping pick-up tube with strainer. Fluid types – gasoline, diesel, kerosene, coolant, non-corrosive materials, medium-viscosity petroleum-based fluids, hydraulic oils, ATF. FM approved

LG402 – Rotary barrel pump comes with standard bung bushing. Delivers approximately one gallon per 18 revolutions of handle.

Item	Description
L1387	ROTARY DRUM PUMP
LG402	CAST IRON PUMP HEAD FOR TRANSFERRING PETROLEUM BASED, NON-CORROSIVE FLUIDS

**TRANSFER**



L1550 – self-priming, cast-iron pump with insulated weatherproof design. Stainless-steel 90-degree hose adapter. 1” pump inlet and outlet offer high flow rate. 360-degree locking bung for proper positioning. Three-piece telescoping pick-up tube for varying tank depths. Pre-wired, heavy-gauge, 18 ft cable for operator convenience. 13 ft commercial-grade, kink-resistant, anti-static hose  
 L9989 – Portal pump with drum cover and 7 ft grease hose.

Item	Description
L1550	FUEL TRANSFER PUMP
L9989	PORTABLE PUMP WITH PAIL COVER

**GREASE FITTING KITS**

**GREASE FITTINGS KIT**



**GREASE FITTING KIT**

1/4-28 Straight, 45°, 65°, 90° and long.

1/8 Pipe Thread. Straight, 45° and 90°.

**Part #: ZA100**



**METRIC GREASE FITTING KIT**

Includes:

6, 8 and 10mm - Straight, 45° and 90°

**Part #: ZAM100**

Item	Description
ZA100	1/4-28 STRAIGHT, 45, 65, 90 & LONG 1/8 PIPE THR. STR, 45, 90

**METRIC GREASE FITTINGS KIT**

Item	Description
ZAM100	6, 8, 10MM STRAIGHT, 45, 90

**FILTERS, REGULATORS & LUBRICATORS**

**FILTERS**



POLY



METAL

**Filters:  
Standard**

Ports	SCFM
1/4-3/8	70
1/2-3/4	150
1	425

**Specifications**

Fluid: Compressed Air  
Max Inlet Pressure—  
Poly Bowl: 150psig  
Metal Bowl: 250psig  
Max Temperature—  
Poly Bowl: 125F  
Metal Bowl: 175F

Item	F R L Body	Bowl	Port Size
4010A	3/8	POLY	1/4
4011A	3/8	METAL	1/4
4020A	3/8	POLY	3/8
4021A	3/8	METAL	3/8
4030	1/2	POLY	1/2
4031	1/2	METAL	1/2
4032	1/2	POLY	3/4
4040	1/2	METAL	3/4
4041	1	METAL	3/4
4050	1	METAL	1

**REGULATORS**



WITH GAUGE

**Regulators:**

Ports	SCFM
1/4 (miniature)	20
1/4-3/8" (compact)	50
Standard	
1/4-3/8	70
1/2-3/4	150
1	425

**Specifications**

Fluid: Compressed Air  
Max Inlet Pressure: 300psig  
Temperature Range—  
Mini/compact: 0-150F  
Standard: 0-175F  
Gauge Port—  
Mini/compact: 2-1/8" NPT (full flow)  
Standard: 2-1/4" NPT (full flow)  
Outlet Range (all) — 5-125 psi

Item	F R L Body	Gauge	Port Size	Type
3100	MINI		1/4	
4100	MINI		1/4	
4100D	MINI	YES	1/4	
4102	MINI		1/4	NON-REPAIRABLE
4115A	3/8		1/4	
4125A	3/8		3/8	
4135	1/2		1/2	
4145	1/2		3/4	
4155	1		1	

**LUBRICATORS**



METAL



POLY

**Lubricators:  
Standard**

Ports	SCFM
1/4-3/8	35
1/2-3/4	150
1	425

**Specifications**

Fluid: Compressed Air  
 Max Inlet Pressure—  
     Poly Bowl: 150psig  
     Metal Bowl: 250psig  
 Max Temperature:  
     Poly Bowl: 125F  
     Metal Bowl: 175F

Item	F R L Body	Bowl	Port Size	Type
4211A	3/8	METAL	1/4	OIL FOG
4220A	3/8	POLY	3/8	OIL FOG
4221A	3/8	METAL	3/8	OIL FOG
4231	1/2	METAL	1/2	OIL FOG
4241	1/2	METAL	3/4	OIL FOG
4242	1	POLY	1	OIL FOG

**COMBOS**



FILTER &  
REGULATOR



FILTER, REGULATOR  
& LUBRICATOR

Item	F R L Body	Bowl	Port Size	Type
4310A	3/8	POLY	1/4	FILTER, REGULATOR
4405	MINI	POLY	1/4	FILTER, REGULATOR, LUBRICATOR
4420A	3/8	POLY	3/8	FILTER, REGULATOR, LUBRICATOR
4430	1/2	POLY	1/2	FILTER, REGULATOR, LUBRICATOR