


Table of Contents

Categorized Listing

| | | | |
|--|----------|---------|---|
| Standard Barrier | 1 | Crimper | 9 |
| <hr/> | | | |
| HOSE | 1 | | |
| Beadlock Hose | 1 | | |
| FITTINGS | 1 | | |
| Female O-Ring | 1 | | |
| Female O-Ring with R12 Service Port | 1 | | |
| Female O-Ring with R134A Service Port | 1 | | |
| Female O-Ring 45 | 1 | | |
| Female O-Ring 45 with R12 Service Port | 2 | | |
| Female O-Ring 45 with R134A Service Port | 2 | | |
| Female O-Ring 90 | 2 | | |
| Female O-Ring 90 with R12 Service Port | 2 | | |
| Female O-Ring 90 with R134A Service Port | 2 | | |
| Male O-Ring | 2 | | |
| Male O-Ring 45 | 3 | | |
| Male O-Ring 90 | 3 | | |
| SAE 45deg Female Flare | 3 | | |
| SAE 45deg Female Flare 45 | 3 | | |
| SAE 45deg Female Flare 90 | 4 | | |
| Male Insert O-Ring | 4 | | |
| Male Insert O-Ring 90 | 4 | | |
| Female Metric Threads | 4 | | |
| Female Metric Threads 90 | 4 | | |
| Metric Tubing Repair Compression | 4 | | |
| English Tubing Repair Compression | 5 | | |
| English Tubing Repair Compression 90 | 5 | | |
| Splicer | 5 | | |
| Splicer with R134A Service Port | 5 | | |
| Weld-On Beadlock Aluminum | 5 | | |
| Weld-On Beadlock Steel | 5 | | |
| Ferrules | 6 | | |
| Reduced Barrier | 6 | | |
| HOSE | 6 | | |
| Reduced Barrier Hose | 6 | | |
| FITTINGS | 6 | | |
| Female O-Ring | 6 | | |
| Female O-Ring with R134A Service Port | 6 | | |
| Female O-Ring 45 | 6 | | |
| Female O-Ring 45 with R134A Service Port | 7 | | |
| Female O-Ring 90 | 7 | | |
| Female O-Ring 90 with R134A Service Port | 7 | | |
| Male O-Ring | 7 | | |
| Male O-Ring 45 | 7 | | |
| Male O-Ring 90 | 7 | | |
| SAE 45deg Female Flare | 8 | | |
| SAE 45deg Female Flare 45 | 8 | | |
| SAE 45deg Female Flare 90 | 8 | | |
| Male Insert O-Ring | 8 | | |
| Male Insert O-Ring 90 | 8 | | |
| English Tubing Repair Compression | 8 | | |
| Splicer | 9 | | |
| Ferrules | 9 | | |
| Accessories | 9 | | |
| O-RINGS | 9 | | |
| Refrigerant O-Rings | 9 | | |
| TOOLS | 9 | | |

Standard Barrier HOSE


Beadlock Hose

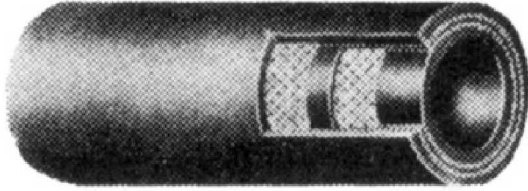

| Item | Hose ID | Hose OD | Working Pressure | Min Burst Pressure | Bend Radius |
|--------|---------|---------|------------------|--------------------|-------------|
| ACH-6 | 5/16 | .75 | 500 | 2000 | 4.0 |
| ACH-8 | 13/32 | .91 | 500 | 2000 | 4.7 |
| ACH-10 | 1/2 | 1.0 | 500 | 2000 | 5.5 |
| ACH-12 | 5/8 | 1.13 | 350 | 1750 | 6.5 |


FITTINGS

Female O-Ring




| Item | Hose ID | Tube Size | Thread Size |
|--------|-------------|-----------|-------------|
| AC1301 | 5/16" (#6) | 3/8 | 5/8-18 |
| AC1302 | 13/32" (#8) | 1/2 | 3/4-16 |
| AC1303 | 1/2" (#10) | 5/8 | 7/8-14 |
| AC1304 | 5/8" (#12) | 3/4 | 1-1/16--14 |
| AC1306 | 1/2" (#10) | 1/2 | 3/4-16 |

Female O-Ring with R12 Service Port




| Item | Hose ID | Tube Size | Thread Size |
|----------|-------------|-----------|-------------|
| AC1301-1 | 5/16" (#6) | 3/8 | 5/8-18 |
| AC1302-1 | 13/32" (#8) | 1/2 | 3/4-16 |
| AC1303-1 | 1/2" (#10) | 5/8 | 7/8-14 |

Female O-Ring with R134A Service Port




| Item | Hose ID | Tube Size | Thread Size |
|----------|-------------|-----------|-------------|
| AC1301-3 | 5/16" (#6) | 3/8 | 5/8-18 |
| AC1302-3 | 13/32" (#8) | 1/2 | 3/4-16 |
| AC1303-3 | 1/2" (#10) | 5/8 | 7/8-14 |

Female O-Ring 45

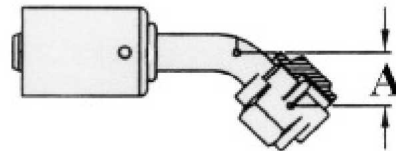


| Item | Hose ID | Tube Size | Thread Size | Drop Length |
|--------|-------------|-----------|-------------|-------------|
| AC1311 | 5/16" (#6) | 3/8 | 5/8-18 | .56 |
| AC1312 | 13/32" (#8) | 1/2 | 3/4-16 | .63 |
| AC1313 | 1/2" (#10) | 5/8 | 7/8-14 | .88 |
| AC1314 | 5/8" (#12) | 3/4 | 1-1/16--14 | .94 |

Female O-Ring 45 with R12 Service Port

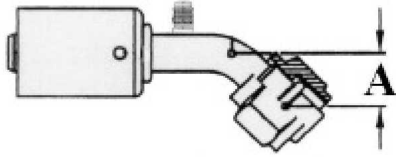


| Item | Hose ID | Tube Size | Thread Size | Drop Length |
|----------|-------------|-----------|-------------|-------------|
| AC1311-1 | 5/16" (#6) | 3/8 | 5/8-18 | .56 |
| AC1312-1 | 13/32" (#8) | 1/2 | 3/4-16 | .63 |
| AC1313-1 | 1/2" (#10) | 5/8 | 7/8-14 | .88 |

Female O-Ring 90 with R12 Service Port

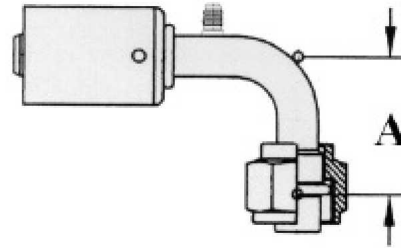


| Item | Hose ID | Tube Size | Thread Size | Drop Length |
|----------|-------------|-----------|-------------|-------------|
| AC1321-1 | 5/16" (#6) | 3/8 | 5/8-18 | 1.12 |
| AC1322-1 | 13/32" (#8) | 1/2 | 3/4-16 | 1.31 |
| AC1323-1 | 1/2" (#10) | 5/8 | 7/8-14 | 1.50 |
| AC1327-1 | 5/8" (#12) | 5/8 | 7/8-14 | 1.75 |

Female O-Ring 45 with R134A Service Port

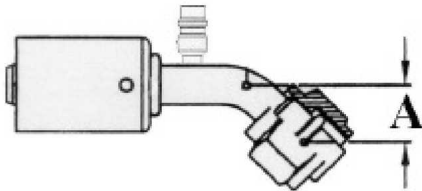


| Item | Hose ID | Tube Size | Thread Size | Drop Length |
|----------|-------------|-----------|-------------|-------------|
| AC1311-3 | 5/16" (#6) | 3/8 | 5/8-18 | .56 |
| AC1312-3 | 13/32" (#8) | 1/2 | 3/4-16 | .63 |
| AC1313-3 | 1/2" (#10) | 5/8 | 7/8-14 | .88 |

Female O-Ring 90 with R134A Service Port

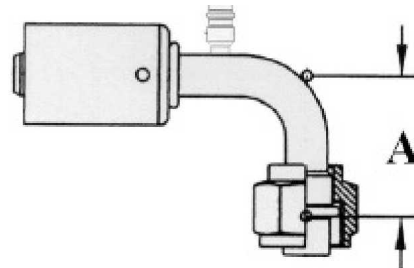


| Item | Hose ID | Tube Size | Thread Size | Drop Length |
|----------|-------------|-----------|-------------|-------------|
| AC1321-3 | 5/16" (#6) | 3/8 | 5/8-18 | 1.12 |
| AC1322-3 | 13/32" (#8) | 1/2 | 3/4-16 | 1.31 |
| AC1323-3 | 1/2" (#10) | 5/8 | 7/8-14 | 1.50 |
| AC1327-3 | 5/8" (#12) | 5/8 | 7/8-14 | 1.75 |

Female O-Ring 90

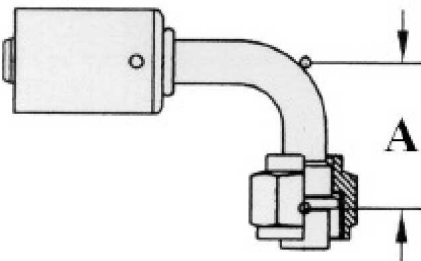


| Item | Hose ID | Tube Size | Thread Size | Drop Length |
|--------|-------------|-----------|-------------|-------------|
| AC1321 | 5/16" (#6) | 3/8 | 5/8-18 | 1.12 |
| AC1322 | 13/32" (#8) | 1/2 | 3/4-16 | 1.31 |
| AC1323 | 1/2" (#10) | 5/8 | 7/8-14 | 1.50 |
| AC1324 | 5/8" (#12) | 3/4 | 1-1/16--12 | 1.75 |
| AC1327 | 5/8" (#12) | 5/8 | 7/8-14 | 1.75 |

Male O-Ring




| Item | Hose ID | Tube Size | Thread Size |
|--------|-------------|-----------|-------------|
| AC1401 | 5/16" (#6) | 3/8 | 5/8-18 |
| AC1402 | 13/32" (#8) | 1/2 | 3/4-18 |
| AC1403 | 1/2" (#10) | 5/8 | 7/8-18 |
| AC1404 | 5/8" (#12) | 3/4 | 1-1/16--16 |

Male O-Ring 45

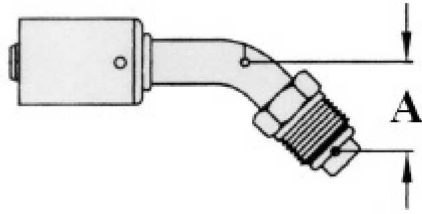


| Item | Hose ID | Tube Size | Thread Size | Drop Length |
|--------|-------------|-----------|-------------|-------------|
| AC1411 | 5/16" (#6) | 3/8 | 5/8-18 | .88 |
| AC1412 | 13/32" (#8) | 1/2 | 3/4-18 | 1.00 |
| AC1413 | 1/2" (#10) | 5/8 | 7/8-18 | 1.06 |
| AC1414 | 5/8" (#12) | 3/4 | 1-1/16--16 | 1.19 |

SAE 45deg Female Flare




| Item | Hose ID | Tube Size | Thread Size |
|--------|-------------|-----------|-------------|
| AC1101 | 5/16" (#6) | 3/8 | 5/8-18 |
| AC1102 | 13/32" (#8) | 1/2 | 3/4-16 |
| AC1103 | 1/2" (#10) | 5/8 | 7/8-14 |
| AC1104 | 5/8" (#12) | 3/4 | 1-1/16--14 |
| AC1106 | 1/2" (#10) | 1/2 | 3/4-16 |
| AC1108 | 5/16" (#6) | 1/2 | 3/4-16 |

Male O-Ring 90

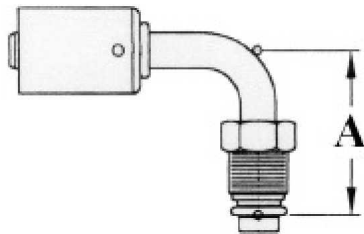


| Item | Hose ID | Tube Size | Thread Size | Drop Length |
|--------|-------------|-----------|-------------|-------------|
| AC1421 | 5/16" (#6) | 3/8 | 5/8-18 | 1.63 |
| AC1422 | 13/32" (#8) | 1/2 | 3/4-18 | 1.88 |
| AC1423 | 1/2" (#10) | 5/8 | 7/8-18 | 2.12 |
| AC1424 | 5/8" (#12) | 3/4 | 1-1/16--16 | 2.25 |

SAE 45deg Female Flare 45

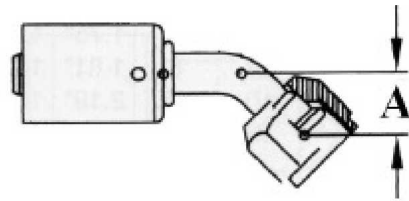


| Item | Hose ID | Tube Size | Thread Size | Drop Length |
|--------|-------------|-----------|-------------|-------------|
| AC1111 | 5/16" (#6) | 3/8 | 5/8-18 | .56 |
| AC1112 | 13/32" (#8) | 1/2 | 3/4-16 | .63 |
| AC1113 | 1/2" (#10) | 5/8 | 7/8-14 | .88 |
| AC1114 | 5/8" (#12) | 3/4 | 1-1/16--14 | 1.00 |

SAE 45deg Female Flare 90

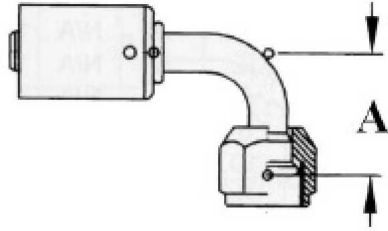


| Item | Hose ID | Tube Size | Thread Size | Drop Length |
|--------|-------------|-----------|-------------|-------------|
| AC1121 | 5/16" (#6) | 3/8 | 5/8-18 | 1.06 |
| AC1122 | 13/32" (#8) | 1/2 | 3/4-16 | 1.25 |
| AC1123 | 1/2" (#10) | 5/8 | 7/8-14 | 1.50 |

Male Insert O-Ring




| Item | Hose ID | Tube Size | Thread Size |
|--------|-------------|-----------|-------------|
| AC1801 | 5/16" (#6) | 3/8 | 5/8-18 |
| AC1802 | 13/32" (#8) | 1/2 | 3/4-16 |
| AC1803 | 1/2" (#10) | 5/8 | 7/8-14 |
| AC1804 | 5/8" (#12) | 3/4 | 1-1/16--14 |

Male Insert O-Ring 90

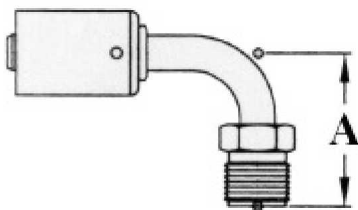


| Item | Hose ID | Tube Size | Thread Size | Drop Length |
|--------|-------------|-----------|-------------|-------------|
| AC1821 | 5/16" (#6) | 3/8 | 5/8-18 | 1.50 |
| AC1822 | 13/32" (#8) | 1/2 | 3/4-16 | 1.75 |
| AC1823 | 1/2" (#10) | 5/8 | 7/8-14 | 2.00 |

Female Metric Threads




| Item | Hose ID | Tube Size | Thread Size |
|--------|-------------|-----------|---------------|
| AC9301 | 5/16" (#6) | 3/8 | 9/16-18 (M14) |
| AC9302 | 5/16" (#6) | M16 | M16-1.5 |
| AC9306 | 13/32" (#8) | M22 | M22-1.5 |
| AC9307 | 13/32" (#8) | M24 | M24-2.0 |
| AC9308 | 5/8" (#12) | M27 | M27-2.0 |

Female Metric Threads 90




| Item | Hose ID | Tube Size | Thread Size | Drop Length |
|--------|------------|-----------|-------------|-------------|
| AC9321 | 5/16" (#6) | 3/8 | 9/16-18 | 1.12 |
| AC9322 | 5/16" (#6) | M16 | M16-1.5 | 1.12 |
| AC9326 | 1/2" (#10) | M22 | M22-1.5 | 1.50 |
| AC9327 | 1/2" (#10) | M24 | M24-2.0 | 1.50 |
| AC9328 | 5/8" (#12) | M27 | M27-2.0 | 1.75 |

Metric Tubing Repair Compression




| Item | Hose ID | Tube Size | Thread Size |
|-------------|-------------|-----------|-------------|
| AC3001STEEL | 5/16" (#6) | M8 | 5/8-8 |
| AC3002STEEL | 13/32" (#8) | M12 | 3/4-16 |
| AC3003STEEL | 1/2" (#10) | M14.5 | 7/8-14 |

English Tubing Repair Compression




| Item | Hose ID | Tube Size | Thread Size |
|-------------|-------------|-----------|-------------|
| AC2901STEEL | 5/16" (#6) | 3/8 | 5/8-18 |
| AC2902STEEL | 13/32" (#8) | 1/2 | 3/4-16 |
| AC2903STEEL | 1/2" (#10) | 5/8 | 7/8-14 |
| AC2904STEEL | 5/8" (#12) | 3/4 | 1-1/16--14 |
| AC2906STEEL | 1/2" (#10) | 1/2 | 3/4-16 |
| AC2907STEEL | 5/8" (#12) | 5/8 | 7/8-14 |
| AC2908STEEL | 5/16" (#6) | 1/2 | 3/4-16 |

English Tubing Repair Compression 90

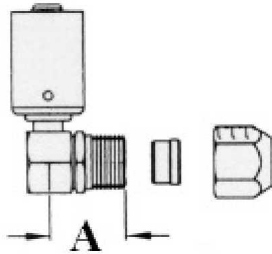


| Item | Hose ID | Tube Size | Thread Size | Drop Length |
|-------------|-------------|-----------|-------------|-------------|
| AC2922STEEL | 13/32" (#8) | 1/2 | 3/4-16 | 1.06 |

Splicer




| Item | Hose ID |
|--------|-------------|
| AC6101 | 5/16" (#6) |
| AC6102 | 13/32" (#8) |
| AC6103 | 1/2" (#10) |
| AC6104 | 5/8" (#12) |

Splicer with R134A Service Port




| Item | Hose ID |
|----------|-------------|
| AC6101-3 | 5/16" (#6) |
| AC6102-3 | 13/32" (#8) |
| AC6103-3 | 1/2" (#10) |
| AC6104-3 | 5/8" (#12) |

Weld-On Beadlock Aluminum




| Item | Hose ID | Tube Size |
|--------|-------------|-----------|
| AC6601 | 5/16" (#6) | 3/8 |
| AC6602 | 13/32" (#8) | 1/2 |
| AC6603 | 1/2" (#10) | 5/8 |
| AC6604 | 5/8" (#12) | 3/4 |
| AC6605 | 5/8" (#12) | 5/8 |

Weld-On Beadlock Steel



| Item | Hose ID | Tube Size |
|-------------|-------------|-----------|
| AC6601STEEL | 5/16" (#6) | 3/8 |
| AC6602STEEL | 13/32" (#8) | 1/2 |
| AC6603STEEL | 1/2" (#10) | 5/8 |
| AC6604STEEL | 5/8" (#12) | 3/4 |
| AC6605STEEL | 5/8" (#12) | 5/8 |

Ferrules




| Item | Hose ID |
|------------|---------|
| 34712A-COO | 5/8 |
| 34706A-COO | 5/16 |
| 34708A-COO | 13/32 |
| 34710A-COO | 1/2 |

Reduced Barrier

HOSE


Reduced Barrier Hose

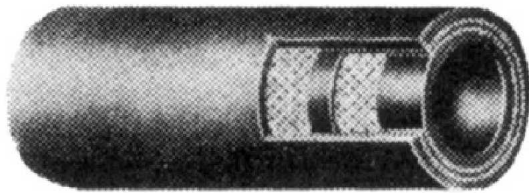

| Item | Hose ID | Hose OD | Working Pressure | Min Burst Pressure | Bend Radius |
|---------|---------|---------|------------------|--------------------|-------------|
| ACHR-6 | 5/16 | .56 | 500 | 2000 | 1.0 |
| ACHR-8 | 13/32 | .69 | 500 | 2000 | 1.5 |
| ACHR-10 | 1/2 | .75 | 500 | 2000 | 2.5 |
| ACHR-12 | 5/8 | .94 | 350 | 1750 | 4.0 |


FITTINGS

Female O-Ring




| Item | Hose ID | Thread Size |
|---------|-------------|-------------|
| ACR1301 | 5/16" (#6) | 5/8-18 |
| ACR1308 | 5/16" (#6) | 3/4-16 |
| ACR1302 | 13/32" (#8) | 3/4-16 |
| ACR1306 | 1/2" (#10) | 7/8-14 |
| ACR1303 | 1/2" (#10) | 1-1/16--14 |

Female O-Ring with R134A Service Port

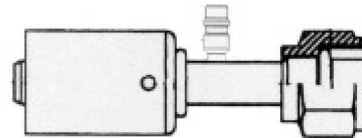


| Item | Hose ID | Thread Size |
|-----------|-------------|-------------|
| ACR1303-3 | 5/16" (#6) | 5/8-18 |
| ACR1302-3 | 13/32" (#8) | 3/4-16 |
| ACR1303-3 | 1/2" (#10) | 7/8-14 |
| ACR1304-3 | 5/8" (#12) | 1-1/16--14 |

Female O-Ring 45

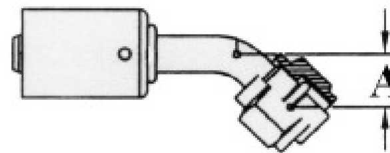


| Item | Hose ID | Thread Size |
|---------|-------------|-------------|
| ACR1311 | 5/16" (#6) | 5/8-18 |
| ACR1312 | 13/32" (#8) | 3/4-16 |
| ACR1313 | 1/2" (#10) | 7/8-14 |
| ACR1314 | 5/8" (#12) | 1-1/16--14 |

Female O-Ring 45 with R134A Service Port

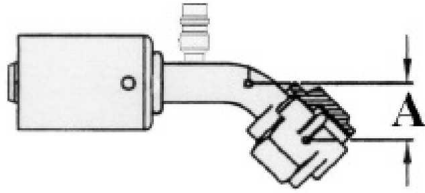


| Item | Hose ID | Thread Size |
|-----------|-------------|-------------|
| ACR1311-3 | 5/16" (#6) | 5/8-18 |
| ACR1312-3 | 13/32" (#8) | 3/4-16 |
| ACR1313-3 | 1/2" (#10) | 7/8-14 |
| ACR1317-3 | 5/8" (#12) | 7/8-14 |
| ACR1314-3 | 5/8" (#12) | 1-1/16--14 |

Female O-Ring 90

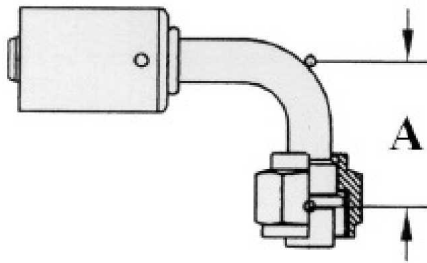


| Item | Hose ID | Thread Size |
|---------|-------------|-------------|
| ACR1321 | 5/16" (#6) | 5/8-18 |
| ACR1325 | 13/32" (#8) | 5/8-18 |
| ACR1322 | 13/32" (#8) | 3/4-16 |
| ACR1323 | 1/2" (#10) | 7/8-14 |
| ACR1327 | 5/8" (#12) | 7/8-14 |
| ACR1324 | 5/8" (#12) | 1-1/16--14 |

Female O-Ring 90 with R134A Service Port

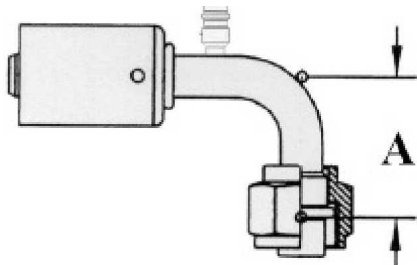


| Item | Hose ID | Thread Size |
|-----------|-------------|-------------|
| ACR1321-3 | 5/16" (#6) | 5/8-18 |
| ACR1322-3 | 13/32" (#8) | 3/4-16 |
| ACR1323-3 | 1/2" (#10) | 7/8-14 |
| ACR1327-3 | 5/8" (#12) | 7/8-14 |
| ACR1324-3 | 5/8" (#12) | 1-1/16--14 |

Male O-Ring




| Item | Hose ID | Thread Size |
|---------|-------------|-------------|
| ACR1401 | 5/16" (#6) | 5/8-18 |
| ACR1402 | 13/32" (#8) | 3/4-18 |
| ACR1403 | 1/2" (#10) | 7/8-18 |
| ACR1406 | 1/2" (#10) | 1-1/16--16 |
| ACR1407 | 5/8" (#12) | 7/8-18 |
| ACR1404 | 5/8" (#12) | 1-1/16--16 |

Male O-Ring 45

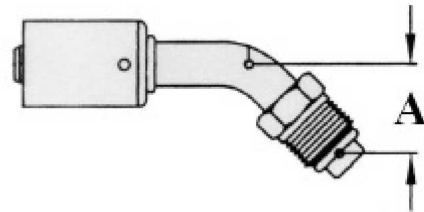


| Item | Hose ID | Thread Size |
|---------|-------------|-------------|
| ACR1411 | 5/16" (#6) | 5/8-18 |
| ACR1412 | 13/32" (#8) | 3/4-18 |
| ACR1413 | 5/8" (#12) | 7/8-18 |
| ACR1414 | 5/8" (#12) | 1-1/16--16 |

Male O-Ring 90

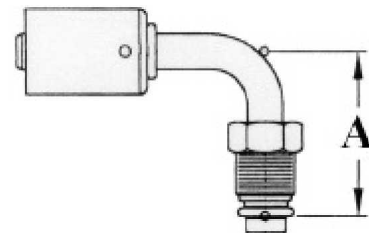


| Item | Hose ID | Thread Size |
|---------|-------------|-------------|
| ACR1421 | 5/16" (#6) | 5/8-18 |
| ACR1422 | 13/32" (#8) | 3/4-18 |
| ACR1423 | 1/2" (#10) | 7/8-18 |
| ACR1427 | 5/8" (#12) | 7/8-18 |
| ACR1424 | 5/8" (#12) | 1-1/16--16 |

SAE 45deg Female Flare




| Item | Hose ID | Thread Size |
|---------|-------------|-------------|
| ACR1101 | 5/16" (#6) | 5/8-18 |
| ACR1108 | 5/16" (#6) | 3/4-16 |
| ACR1102 | 13/32" (#8) | 3/4-16 |
| ACR1103 | 1/2" (#10) | 7/8-14 |
| ACR1107 | 5/8" (#12) | 7/8-14 |
| ACR1104 | 5/8" (#12) | 1-1/16--14 |

SAE 45deg Female Flare 45

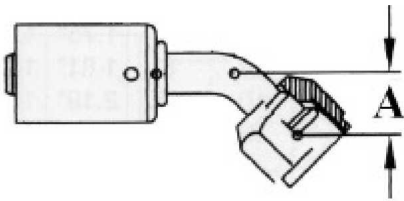


| Item | Hose ID | Thread Size |
|---------|-------------|-------------|
| ACR1111 | 5/16" (#6) | 5/8-18 |
| ACR1112 | 13/32" (#8) | 3/4-16 |
| ACR1113 | 1/2" (#10) | 7/8-14 |
| ACR1117 | 5/8" (#12) | 7/8-14 |
| ACR1114 | 5/8" (#12) | 1-1/16--14 |

SAE 45deg Female Flare 90

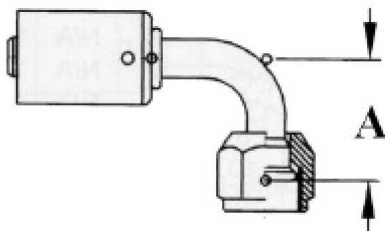


| Item | Hose ID | Thread Size |
|---------|-------------|-------------|
| ACR1121 | 5/16" (#6) | 5/8-18 |
| ACR1122 | 13/32" (#8) | 3/4-16 |
| ACR1123 | 1/2" (#10) | 7/8-14 |
| ACR1127 | 5/8" (#12) | 7/8-14 |
| ACR1124 | 5/8" (#12) | 1-1/16--14 |

Male Insert O-Ring




| Item | Hose ID | Thread Size |
|---------|------------|-------------|
| ACR1801 | 5/16" (#6) | 5/8-18 |
| ACR1803 | 1/2" (#10) | 7/8-14 |
| ACR1804 | 5/8" (#12) | 1-1/16--14 |

Male Insert O-Ring 90

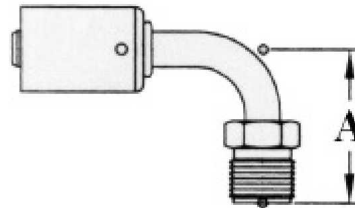


| Item | Hose ID | Thread Size |
|---------|-------------|-------------|
| ACR1821 | 5/16" (#6) | 5/8-18 |
| ACR1822 | 13/32" (#8) | 3/4-16 |
| ACR1823 | 1/2" (#10) | 7/8-14 |
| ACR1824 | 5/8" (#12) | 1-1/16--14 |

English Tubing Repair Compression




| Item | Hose ID | Tube Size | Thread Size |
|--------------|-------------|-----------|-------------|
| ACR2901STEEL | 5/16" (#6) | 3/8 | 5/8-18 |
| ACR2902STEEL | 13/32" (#8) | 1/2 | 3/4-16 |
| ACR2909STEEL | 13/32" (#8) | 5/8 | 7/8-14 |
| ACR2906STEEL | 1/2" (#10) | 1/2 | 3/4-16 |
| ACR2903STEEL | 1/2" (#10) | 5/8 | 7/8-14 |
| ACR2907STEEL | 5/8" (#12) | 5/8 | 7/8-14 |
| ACR2904STEEL | 5/8" (#12) | 3/4 | 1-1/16--14 |

Splicer



| Item | Hose ID |
|---------|-------------|
| ACR6101 | 5/16" (#6) |
| ACR6102 | 13/32" (#8) |
| ACR6103 | 1/2" (#10) |
| ACR6104 | 5/8" (#12) |

Ferrules



| Item | Hose ID |
|-------------|---------|
| 34706AR-COO | 5/16 |
| 34708AR-COO | 13/32 |
| 34710AR-COO | 1/2 |
| 34712AR-COO | 3/4 |

Accessories

O-RINGS

Refrigerant O-Rings



| Item | Tube Size |
|------|-----------|
| AC35 | 3/8 |
| AC40 | 1/2 |
| AC45 | 5/8 |
| AC50 | 3/4 |

TOOLS

Crimper



| Item |
|--------|
| AC3710 |